




## Fission FT

The non-directional fine fissured surface provides a solution for providing Class C sound absorption.

## Key Features

- Good sound absorption: 0.60(H)  $\alpha_w$
- Ideal for storage facilities, corridor and warehouses

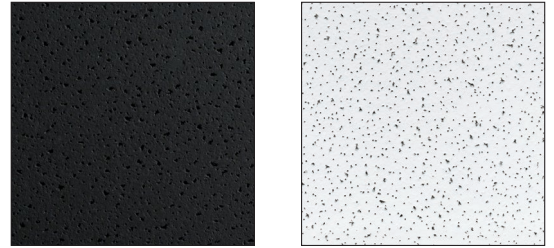

Edge Detail	Board	Tegular24	Tegular15
Thickness (mm)	15	15	15
Modules (mm)	600 x 600 ..... 9121M 1200 x 600 ..... 9120M	600 x 600 ..... 9122M	600 x 600 ..... 9202M
Suspension Systems	Gridline 24 Butt Cut / Joggled	Gridline 24 Butt Cut / Joggled	Gridline 15 Butt Cut / Joggled
Colour	Global White / Black (available for 9121M only)		

## Sustainability



51%



A+



EN 13964 / E1

## Acoustics



EN ISO 354  
& EN ISO 11654



EN ISO 21040-9  
& EN ISO 717-1

	$\alpha_w$	$D_{nfw}$	Class	NRC	Hz $\alpha_p$					
					125	250	500	1000	2000	4000
Board, Tegular24, Tegular15	0.60(H)	34 dB	C	0.65	0.40	0.40	0.55	0.80	0.85	0.85
Board (Black)	0.60(H)	34 dB	C	0.65	0.35	0.40	0.55	0.75	0.80	0.85

## Fire Reaction



Euroclass A2-s1, d0  
EN 13501-1

## Performances & Features



85%  
White



95% RH



3.4 Kg/m<sup>2</sup>



30 Year  
System  
Guarantee



BIM  
READY

If you would like to order a sample or have any queries about this product please contact our Technical Sales Team on **0800 371 849** or email [enquiries@zentia.com](mailto:enquiries@zentia.com)

TDS 076.5.03.25